



keep a **SharpEye™** on your safety



40/40UFI

Ultra Fast Triple IR (IR3) Flame Detector

Superior performance, reliability and immunity to false alarms

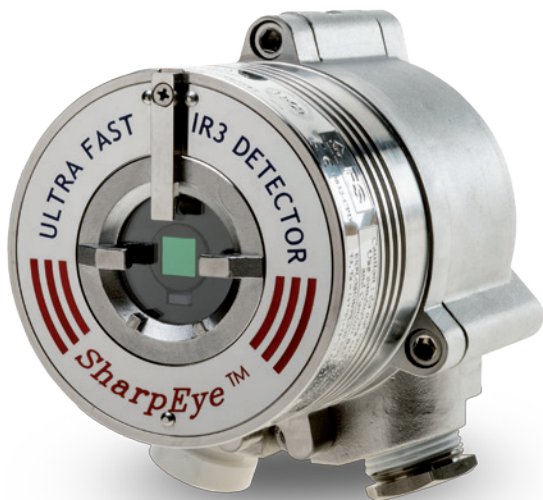

SharpEye™

The new 40/40UFI, an Ultra-Fast multi-spectrum IR3 Flame Detector, detects hydrocarbon fuel and gas fires at long distances, and is especially designed to detect an explosive 1 ft (0.3m) diameter gas cloud explosion in max. 50 msec for 1ft diameter sphere methane-air mixture explosion at 66 ft (20m) with the highest immunity to false alarms. The 40/40UFI IR3 can also detect a 1 ft² (0.1m²) gasoline/n-Heptane pan fire at up to 300 ft (90m). The 40/40UFI is part of the 40/40 Series, the most durable and weather resistant range of flame detectors currently on the market. Features include a heated window, to eliminate condensation and icing; HART capability for digital communications; lower power requirements; and a compact, lighter design. Due to increased reliability, the 40/40 Series warranty period has been extended to 5 years and is SIL2 (TUV) approved per IEC 61508.

FEATURES & BENEFITS

- Multi Spectrum Design - for long distance detection and high false alarm immunity
- High Speed Response - 50 msec
- Sensitivity Selection - to ensure no zone crossover detection
- Automatic Built-In-Test (BIT) - to assure continued reliable operation
- Heated window - for operation in harsh weather conditions (snow, ice, condensation)
- Multiple output options for maximum flexibility and compatibility
 - Relays (3) for Alarm, Fault and Auxiliary
 - Analogue output for fast detection
 - 0-20mA (stepped)
 - HART Protocol for maintenance and asset management
 - RS-485, Modbus Compatible
- High Reliability - MTBF - minimum 150,000 hours
- Safety Integrity Level SIL2 (TUV)
- 5-Year Warranty
- User Programmable via HART or RS-485
- Hazardous area zones:
 - Zones 1 & 2 with IIC gas group vapors present
 - Zones 21 & 22 with IIIC dust type present
- Ex approved to:
 - ATEX & IECEx
 - FM/FMC/CSA
 - TR CU (EAC)
- 3rd party Performance
 - EN54-10 (VdS)
 - FM3260 (FM)

APPLICATIONS

Offshore Oil & Gas installations	Power Generation facilities
Onshore Oil & Gas installations and pipelines	Pharmaceutical Industry
Chemical plants	Printing Industry
Petrochemicals plants	Warehouses
Storage Tank farms	Automotive Industry
Aircraft hangars	Explosives & Munitions
	Waste Disposal facilities

keep a **SharpEye™** on your safety

GENERAL SPECIFICATIONS

Spectral Response	Three IR Bands					
Detection Range (at highest Sensitivity Setting for 1ft ² (0.1m ²) pan fire)	Fuel	ft / m	Fuel	ft / m	Fuel	ft / m
	n-Heptane	300 / 90	Kerosene	205 / 62	Methane*	205 / 62
	Gasoline	300 / 90	Ethanol 95%	185 / 55	LPG*	205 / 62
	Diesel Fuel	205 / 62	Methanol	160 / 48	Polypropylene Pellets	160 / 48
	JP5	205 / 62	IPA (Isopropyl Alcohol)	185 / 55	Office Paper	115 / 34
	* 30" (0.75m) high, 10" (0.25m) width plume fire					
High Speed Response	50 msec for 1ft diameter sphere methane-air mixture explosion at 66ft (20m)					
Response Time	Typically 2 sec at 131ft (40m) Typically 10 sec at 300ft (90m)					
Adjustable Time Delay	Up to 30 seconds					
Sensitivity Ranges	4 Sensitive ranges for 1 ft ² (0.1m ²) n-heptane pan fire from 66 ft (20m) to 300 ft (90m)					
Field of View	Horizontal 90°; Vertical 90°					
Built-in-Test (BIT)	Automatic					
Temperature Range	Operating: -67°F to +167°F (-55°C to +75°C) Option: -67°F to +185°F (-55°C to +85°C) Storage: -67°F to +185°F (-55°C to +85°C)					
Humidity	Up to 95% non-condensing (withstands up to 100% RH for short periods)					
Heated Optics	To eliminate condensation and icing on the window					

ELECTRICAL SPECIFICATIONS

Operating Voltage	24 VDC nominal (18-32 VDC)					
Power Consumption	Standby: Max. 90mA (110mA with heated window) Alarm: Max. 130mA (160mA with heated window)					
Cable Entries	2 x 3/4" - 14NPT conduits or 2 x M25 x 1.5 mm ISO					
Wiring	12 - 22AWG (0.3mm ² - 2.5mm ²)					
Electrical Input Protection	According to MIL-STD-1275B					
Electromagnetic Compatibility	EMI/RFI protected to EN61326-3 and EN61000-6-3					
Electrical Interface	The detector includes twelve (12) terminals with five (5) wiring options (factory set)					

OUTPUTS

Relays	Alarm, Fault and Auxiliary SPST volt-free contacts rated 2A at 30 VDC					
Analogue Output 0-20mA (stepped)	4.75 - 5.25 V at detection Sink (source option) configuration Fault: 0 +1mA Warning: 16mA ± 5% BIT Fault: 2mA ± 10% Alarm: 20mA ± 5% Normal: 4mA ± 10% Resistance Loop: 100-600 Ω					
HART Protocol	Optional HART communications on the 0-20mA analog current (FSK) - used for maintenance, configuration changes and asset management, available in mA source output wiring options					
RS-485	RS-485 Modbus compatible communication link that can be used in computer controlled installations					

MECHANICAL SPECIFICATIONS

Materials	- Stainless Steel 316L with electro polish finish Enclosure options - Heavy duty copper free aluminum (less than 1%), red epoxy enamel finish					
Mounting	Stainless Steel 316L with electro polish finish					
Dimensions	Detector 4" x 4.6" x 6.18" (101.6 x 117 x 157 mm)					
Weight	Detector (St.St.) 6.1 lb (2.8 kg) Tilt mount 2.2 lb (1.0 kg) Detector, aluminum 2.8 lb (1.3 kg)					
Environmental Standards	Meets MIL-STD-810C for Humidity, Salt & Fog, Vibration, Mechanical Shock, High Temp, Low Temp					
Water and Dust	IP66 and IP67 per EN60529, NEMA 250 6P					

APPROVALS

Hazardous Area	ATEX and IECEx	Ex II 2 G D Ex db eb op is IIC T4 Gb Ex tb op is IIIC T96°C Db (-55°C ≤ Ta ≤ +75°C)	Ex db eb op is IIC T4 Gb Ex tb op is IIIC T106°C Db (-55°C ≤ Ta ≤ +85°C)
	FM/FMC/CSA	Class I Div. 1, Groups B, C & D Class II/III Div. 1, Groups E, F & G	
	TR CU (EAC)	1 Ex db eb op is IIC T4 Gb X Ex tb op is IIIC T96°C Db X (-55°C ≤ Ta ≤ +75°C)	1 Ex db eb op is IIC T4 Gb X 1 Ex db eb mb op is II T4 Gb X Ex tb op is IIIC T106°C Db X Ex tb op is IIIC T98°C Db X (-55°C ≤ Ta ≤ +85°C) (-55°C ≤ Ta ≤ +75°C)
Performance	EN54-10 (VdS) FM3260		
Reliability	IEC61508 - SIL2 (TUV)		

ACCESSORIES

Flame Simulator FS-1100	U-Bolt/Pole Mount	789260-2 (2" pole)	Air Shield	777650	Weather Cover	777163 (St.St) *777263 (Plastic)
Tilt Mount	40/40-001	789260-1 (3" pole)				
Duct Mount	777670	USB RS485 Harness Kit	794079			
		E.O.L Encapsulated Resistor	777915-X			

*Supplied free of charge with the detector